


► Filtro **BUNKER V.2** Poliéster Laminado

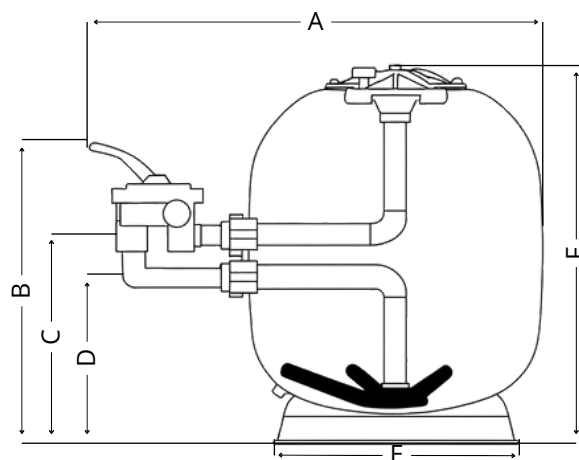

CÓDIGO	Ø mm	A mm	B mm	C mm	D mm	F mm	Con. Ø
BUNKER400V2	Ø400						1½"
BUNKER500V2	Ø500	840	625	415	290	700	1½"
BUNKER600V2	Ø600	920	665	455	330	775	1½"
BUNKER750V2	Ø750						2"

Descripción del producto

Español

- Filtros laminados fabricados en resina de poliéster y fibra de vidrio.
- Excelente acabado exterior en gel coat.
- Base integrada para mayor estabilidad.
- Purga de aire y agua ¼".
- Brazos colectores y difusor para optimizar el flujo.
- Tapa superior con cierre de zuncho.
- Incluye: válvula selectora de 6 vías, manómetro, racores y desagüe.
- Probado a 3,5 bar según norma EN16713-1.

English

- Laminated filters manufactured with polyester resin and fiberglass.
- Excellent exterior finish in gel coat.
- Integrated base for greater stability.
- ¼" air and water relief.
- Collector arms and diffuser to optimize water flow.
- Top cover with V-clamp closure.
- Includes: 6-way multiport valve, pressure gauge, fittings and drain.
- Tested at 3.5 bar according to EN16713-1 standard.

Português

- Filtros laminados fabricados em resina de poliéster e fibra de vidro.
- Excelente acabamento exterior em gel coat.
- Base integrada para maior estabilidade.
- Purga de ar e água ¼".
- Braços coletores e difusor para otimizar o fluxo de água.
- Tampa superior com fecho de abraçadeira.
- Inclui: válvula seletora de 6 vias, manómetro, conexões e dreno.
- Testado a 3,5 bar de acordo com a norma EN16713-1.



Características técnicas

	CÓDIGO	DESCRIPCIÓN	ARENA KG	PESO KG	VOL M ³
BUNKER V2 POLIESTER	BUNKER400V2	Ø400 - 6 m ³ /h salida lateral 1½"	80	15,4	0,15
	BUNKER500V2	Ø500 - 10 m ³ /h salida lateral 1½"	100	17,5	0,22
	BUNKER600V2	Ø600 - 14 m ³ /h salida lateral 1½"	150	22,8	0,33
	BUNKER750V2	Ø750 - 22 m ³ /h salida lateral 2"	250	30,0	0,47

Logística

CÓDIGO	Caja	Uds
BUNKER400V2	0,435x0,530x0,750	1
BUNKER500V2	0,535x0,550x0,758	1
BUNKER600V2	0,620x0,680x0,800	1
BUNKER750V2	0,790x0,790x0,980	1

